

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

D

D

C


C

B

B

A


A

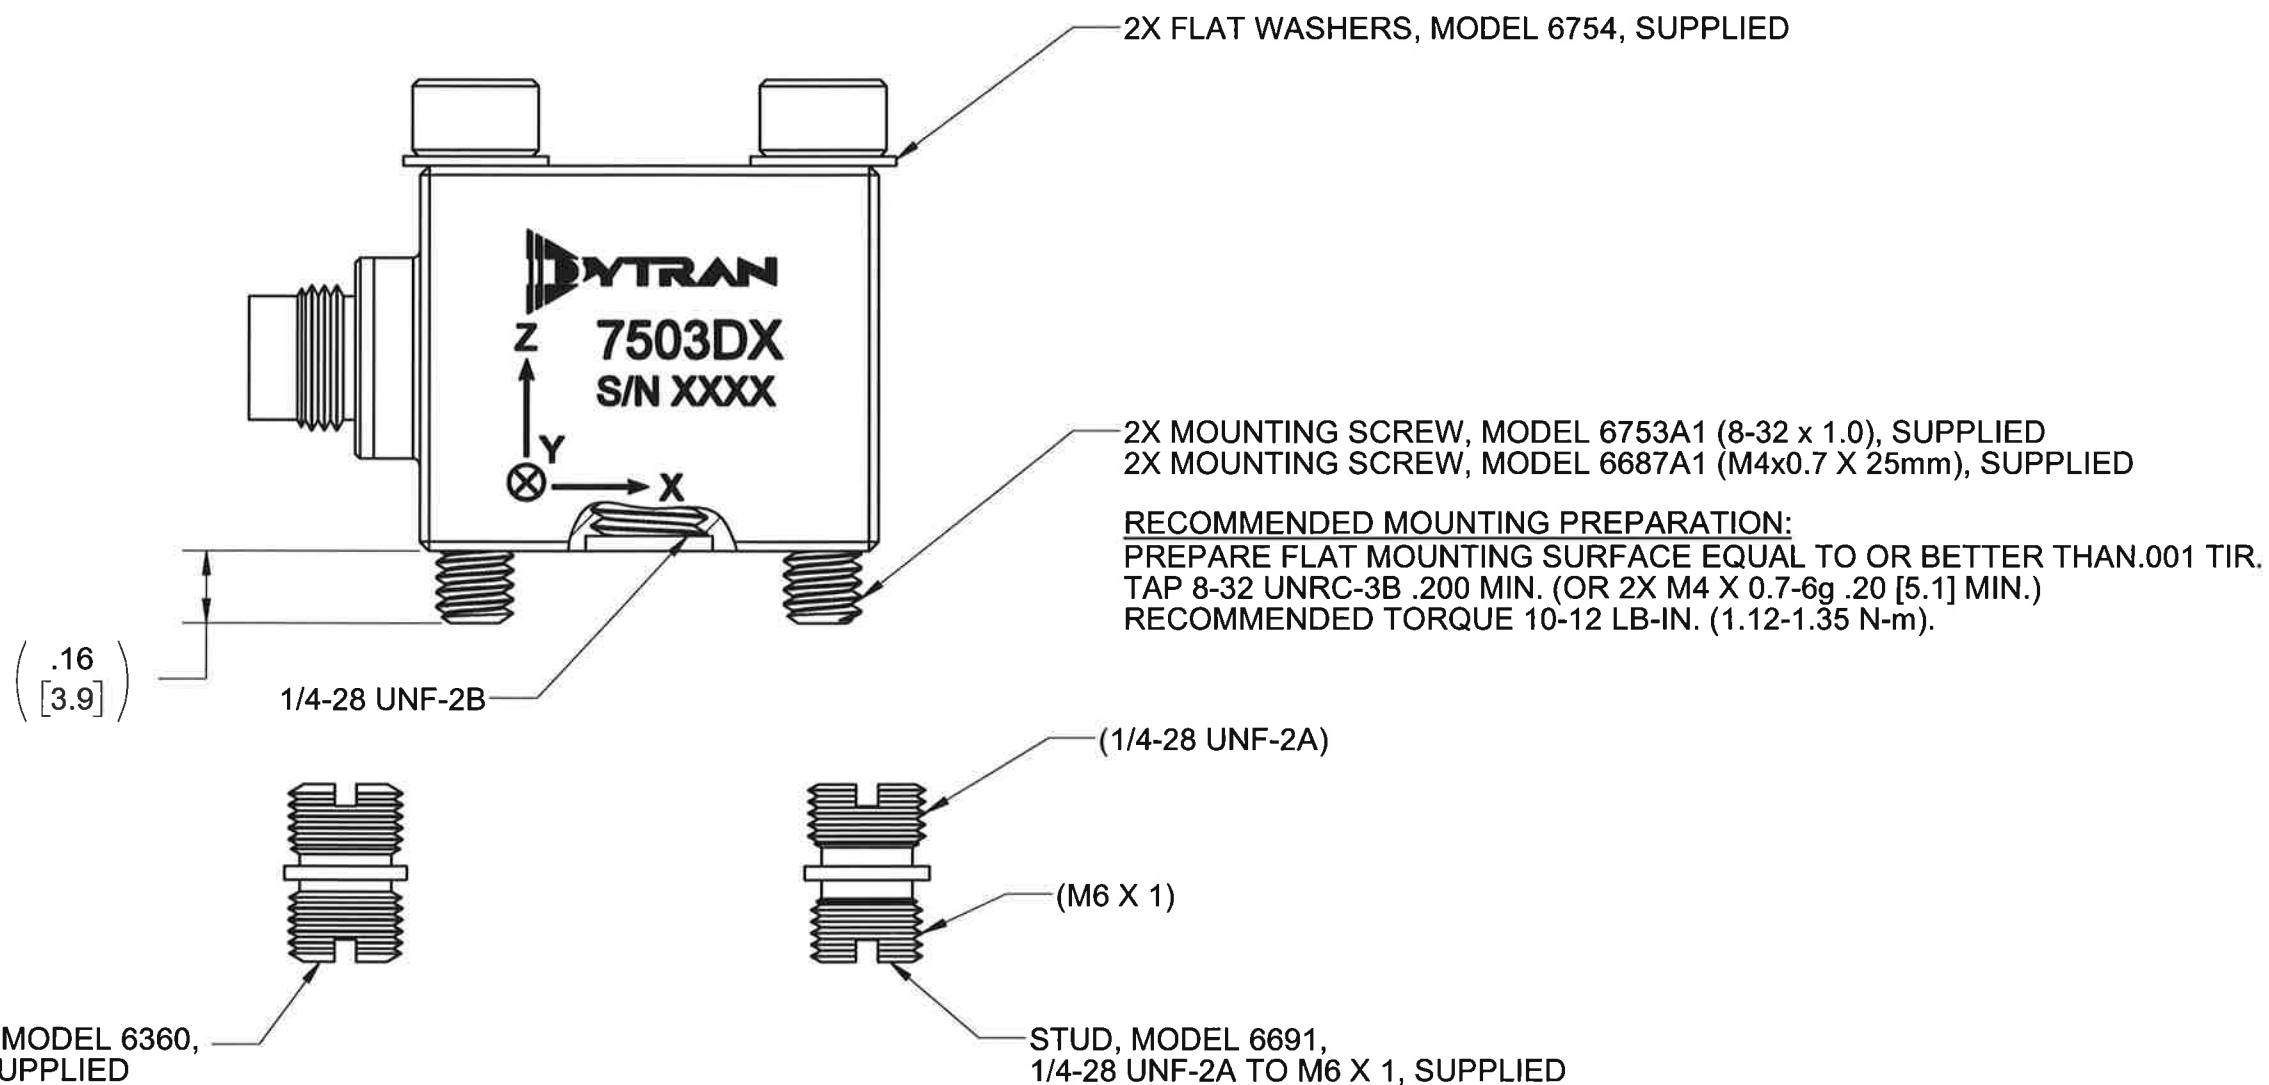


RECOMMENDED MOUNTING PREPARATION: MODEL 6366
PREPARE MOUNTING SURFACE, $\phi 1.25$ [31.2] MIN, FLAT TO .001 TIR.
TAP 1/4-28 UNF-2B ∇ .200 [5.1] MIN. TORQUE TO 12-15 Lb-in.

RECOMMENDED MOUNTING PREPARATION: MODEL 6691
PREPARE MOUNTING SURFACE, $\phi 1.25$ [31.2] MIN, FLAT TO .001 TIR.
TAP M6 X 1 ∇ .200 [5.1] MIN. TORQUE TO 12-15 Lb-in.

		MASTER ONLY IF IN RED	
TITLE: OUTLINE/INSTALLATION DWG, TRIAxIAL DC ACCELEROMETER, 7503D SERIES			
SIZE B	CAGE CODE 2W033	DWG NO 127-7503D	REV D
SCALE: 2:1		SHEET 2 OF 2	

Model Number 7503D8		PERFORMANCE SPECIFICATION				DOC NO PS7503D8																																																													
		TRIAXIAL VARIABLE CAPACITANCE ACCELEROMETER				REV K, ECN 15283, 08/16/19																																																													
		<ul style="list-style-type: none">• VARIABLE CAPACITANCE TECHNOLOGY• ± 4V DIFFERENTIAL OUTPUT• HERMETICALLY SEALED• DC RESPONSE																																																																	
		ENGLISH		SI																																																															
PHYSICAL	Type	1.3		oz	38		grams																																																												
		9-pin, 5/16-32 UNEF-2A		9-pin, 5/16-32 UNEF-2A																																																															
		Titanium Alloy		Titanium Alloy																																																															
		MEMS		MEMS																																																															
PERFORMANCE	Input Range	±400		g	±3924		m/s ²																																																												
	Frequency Response (±5%)	0 - 1600		Hz	0 - 1600		Hz																																																												
	Frequency Response (±10%)	0 - 2000		Hz	0 - 2000		Hz																																																												
	Frequency Response (±3dB)	0 - 4000		Hz	0 - 4000		Hz																																																												
	Resonant Frequency	>3000		Hz	>3000		Hz																																																												
	Sensitivity Differential, ±5% [1]	10		mV/g	1.02		mV/m/s ²																																																												
	Output Noise, Differential ,Typ	400		μ g rms/√ Hz	3,924		μ m/s ² /√ Hz																																																												
	Non-Linearity, Max [2]	0.5		% F.S	0.5		% F.S																																																												
	Cross Axis Sensitivity, Max	3		%	3		%																																																												
	Scale Factor Calibration Error, Max.	1		%	1		%																																																												
	Zero Measured Output	±50		mV	±50		mV																																																												
	ENVIRONMENTAL	Maximum Mechanical Shock (0.1 ms)	±2000		gpk	±19620		m/s ² peak																																																											
Bias Temperature Shift ,Max [3]		111		(ppm of span)/°F	200		(ppm of span)/°C																																																												
Bias Calibration Error, Max		0.5		% of span	0.5		% of span																																																												
Operating Temperature Range [4]		-67 to +257		°F	-55 to +125		°C																																																												
Scale Factor Temperature Shift [3]		-111 to +111		ppm/°F	-200 to +200		ppm/°C																																																												
Seal		Hermetic			Hermetic																																																														
ELECTRICAL	Output Common Mode Voltage, Typ	2.5		VDC	2.5		VDC																																																												
	Output Impedance	<10K		Ω	<10K		Ω																																																												
	Operating Voltage	+6 to +33		VDC	+6 to +33		VDC																																																												
	Operating Current (AOP &AON open), Max	35		mA Dc	35		mA Dc																																																												
	Power Supply Rejection Ratio	>65		dB	>65		dB																																																												
	Ground Isolation	>30		MΩ	>30		MΩ																																																												
		<p>This family also includes:</p> <table><thead><tr><th>Model</th><th>Input Range (g)</th><th>Frequency Response, ±3dB (Hz)</th><th>Sensitivity Differential, ±5% (mV/g)</th><th>Max.Shock (0.1ms) g (peak)</th><th>Noise Differential (μg/√Hz)</th></tr></thead><tbody><tr><td>7503D1</td><td>±2</td><td>0-400</td><td>2,000</td><td>2000</td><td>10.5</td></tr><tr><td>7503D2</td><td>±5</td><td>0-800</td><td>800</td><td>2000</td><td>12</td></tr><tr><td>7503D3</td><td>±10</td><td>0-1000</td><td>400</td><td>2000</td><td>18</td></tr><tr><td>7503D4</td><td>±25</td><td>0-1500</td><td>160</td><td>2000</td><td>44</td></tr><tr><td>7503D5</td><td>±50</td><td>0-2700</td><td>80</td><td>2000</td><td>69</td></tr><tr><td>7503D6</td><td>±100</td><td>0-2500</td><td>40</td><td>2000</td><td>122</td></tr><tr><td>7503D7</td><td>±200</td><td>0-5000</td><td>20</td><td>2000</td><td>290</td></tr><tr><td>7503D9</td><td>±5(X&Y), ±25(Z)</td><td>0-800(X&Y), 0-1500(Z)</td><td>800(X&Y), 160(Z)</td><td>2000</td><td>12(X&Y), 44(Z)</td></tr><tr><td>7503D10</td><td>±5(X&Y), ±50(Z)</td><td>0-800(X&Y), 0-2700(Z)</td><td>800(X&Y), 80(Z)</td><td>2000</td><td>12(X&Y), 69(Z)</td></tr></tbody></table> <p>Refer to the performance specifications of the products in this family for detailed description.</p> <p>Supplied Accessories:</p> <ol style="list-style-type: none">1) Accredited calibration certificate (ISO 17025)2) Mounting stud, Model 6360, 1/4-28 UNF-2A, Qty 13) Mounting stud, Model 6691, 1/4-28 UNF-2A to M6 X 1, Qty 14) Mounting screws, Model 6753A1, 8-32 x 1.0, Qty. 25) Mounting screws, Model 6687A1, M4x0.7 x 25mm, Qty. 26) Flat washers, Model 6754, Qty. 2 <p>Notes:</p> <ol style="list-style-type: none">[1] Single ended sensitivity is half of values shown. (Ref. at 100 Hz)[2] -90% to +90% of Full Scale.[3] Over the rated temperature range.[4] Limit operating voltage to +24VDC when temperature is greater than 240°F (115°C).[5] In the interest of constant product improvement, we reserve the right to change specifications without notice. <p>It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary overtime. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.</p>						Model	Input Range (g)	Frequency Response, ±3dB (Hz)	Sensitivity Differential, ±5% (mV/g)	Max.Shock (0.1ms) g (peak)	Noise Differential (μg/√Hz)	7503D1	±2	0-400	2,000	2000	10.5	7503D2	±5	0-800	800	2000	12	7503D3	±10	0-1000	400	2000	18	7503D4	±25	0-1500	160	2000	44	7503D5	±50	0-2700	80	2000	69	7503D6	±100	0-2500	40	2000	122	7503D7	±200	0-5000	20	2000	290	7503D9	±5(X&Y), ±25(Z)	0-800(X&Y), 0-1500(Z)	800(X&Y), 160(Z)	2000	12(X&Y), 44(Z)	7503D10	±5(X&Y), ±50(Z)	0-800(X&Y), 0-2700(Z)	800(X&Y), 80(Z)	2000	12(X&Y), 69(Z)
Model	Input Range (g)	Frequency Response, ±3dB (Hz)	Sensitivity Differential, ±5% (mV/g)	Max.Shock (0.1ms) g (peak)	Noise Differential (μg/√Hz)																																																														
7503D1	±2	0-400	2,000	2000	10.5																																																														
7503D2	±5	0-800	800	2000	12																																																														
7503D3	±10	0-1000	400	2000	18																																																														
7503D4	±25	0-1500	160	2000	44																																																														
7503D5	±50	0-2700	80	2000	69																																																														
7503D6	±100	0-2500	40	2000	122																																																														
7503D7	±200	0-5000	20	2000	290																																																														
7503D9	±5(X&Y), ±25(Z)	0-800(X&Y), 0-1500(Z)	800(X&Y), 160(Z)	2000	12(X&Y), 44(Z)																																																														
7503D10	±5(X&Y), ±50(Z)	0-800(X&Y), 0-2700(Z)	800(X&Y), 80(Z)	2000	12(X&Y), 69(Z)																																																														



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.700.7880 www.dytran.com

For permission to reprint this content, please contact info@dytran.com

This family also includes:

Model	Input Range (g)	Frequency Response, ±3dB (Hz)	Sensitivity Differential, ±5% (mV/g)	Max Shock (0.1ms) g (peak)	Noise Differential (μg/√Hz)
7503D1	±2	0-400	2,000	2000	10.5
7503D2	±5	0-800	800	2000	12
7503D3	±10	0-1000	400	2000	18
7503D4	±25	0-1500	160	2000	44
7503D5	±50	0-2700	80	2000	69
7503D6	±100	0-2500	40	2000	122
7503D7	±200	0-5000	20	2000	290
7503D9	±5(X&Y), ±25(Z)	0-800(X&Y), 0-1500(Z)	800(X&Y), 160(Z)	2000	12(X&Y), 44(Z)
7503D10	±5(X&Y), ±50(Z)	0-800(X&Y), 0-2700(Z)	800(X&Y), 80(Z)	2000	12(X&Y), 69(Z)


Refer to the performance specifications of the products in this family for detailed description.

Supplied Accessories:

- 1) Accredited calibration certificate (ISO 17025)
- 2) Mounting stud, Model 6360, 1/4-28 UNF-2A, Qty 1
- 3) Mounting stud, Model 6691, 1/4-28 UNF-2A to M6 X 1, Qty 1
- 4) Mounting screws, Model 6753A1, 8-32 x 1.0, Qty. 2
- 5) Mounting screws, Model 6687A1, M4x0.7 x 25mm, Qty. 2
- 6) Flat washers, Model 6754, Qty. 2

Notes:

- [1] Single ended sensitivity is half of values shown. (Ref. at 100 Hz)
 - [2] -90% to +90% of Full Scale.
 - [3] Over the rated temperature range.
 - [4] Limit operating voltage to +24VDC when temperature is greater than 240°F (115°C).
 - [5] In the interest of constant product improvement, we reserve the right to change specifications without notice.
- It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary overtime. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

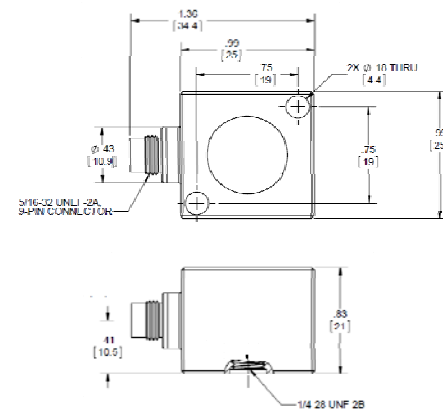

Units on the line drawing are in inches. Refer to 127-7503D for more information.



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax: 818.700.7880 www.dytran.com
For permission to reprint this content, please contact info@dytran.com